



SHARP COB mini Downlights

MR16 Spots incl. LED dimmable driver

All mini downlights have Sharp COB LED with CRI >80

Part nr.	Power [W]	Voltage [VAC]	CCT [K]	Lumens	Beam angle	Life time [hrs]	Size	Picture	Price €
LLC-MR16-6-230-*--R (Reflector version)	6W	AC200-240V	2700 3000 4000 5000	390lm(WW) 470lm(NW) 520lm(CW)	15°/ 28°/40°/60°	>40.000	H:48.7mm Ø:50mm		€ 21,00
LLC-MR16-6-230-*--L (Lens version)	6W	AC200-240V	2700 3000 4000 5000	390lm(WW) 470lm(NW) 520lm(CW)	24°/36°/ 60°	>40.000	H:50mm Ø:50mm		€ 21,00
LLC-MR16-9-230-*--R (Reflector version)	9W	AC200-240V	2700 3000 4000 5000	500lm(WW) 600lm(NW) 650lm(CW)	15°/ 28°/40°/60°	>40.000	H:69.8mm Ø:50mm		€ 26,00
LLC-MR16-9-230-*--L (Lens version)	9W	AC200-240V	2700 3000 4000 5000	500lm(WW) 600lm(NW) 650lm(CW)	24°/36°/ 60°	>40.000	H:69.8mm Ø:50mm		€ 26,00
LLC-MR16-13-230-*--R (Reflector version)	13W	AC200-240V	2700 3000 4000 5000	800lm(WW) 900lm(NW) 950lm(CW)	15°/ 28°/40°/60°	>40.000	H:69.8mm Ø:50mm		€ 31,00
LLC-MR16-13-230-*--L (Lens version)	13W	AC200-240V	2700 3000 4000 5000	800lm(WW) 900lm(NW) 950lm(CW)	24°/36°/ 60°	>40.000	H:69.8mm Ø:50mm		€ 31,00
LLC-MR16-17-230-*--R (Reflector version)	17W	AC200-240V	2700 3000 4000 5000	930lm(WW) 1050lm(NW) 1160lm(CW)	15°/ 28°/40°/60°	>40.000	H:78.5mm Ø:50mm		€ 39,00
LLC-MR16-17-230-*--L (Lens version)	17W	AC200-240V	2700 3000 4000 5000	930lm(WW) 1050lm(NW) 1160lm(CW)	24°/36°/ 60°	>40.000	H:78.5mm Ø:50mm		€ 39,00

* = please add CCT first two digits (e.a. 27 for 2700 K)

** = please add beam angle (e.a. 15 for 15 degrees)



Downlight Housings White




Downlight Fittings Compatibility

Name	Model No.	Cut size (mm)	adjustable angle	Dimension (mm)	Picture	Price €
70 mm cut-out with arc	A-70	Ø70	adjustable 30°			€ 5,00
90 mm cut-out with arc	A-90	Ø90	adjustable 30°			€ 5,00
75 mm cut-out with arc	D-75	Ø75	non adjustable			€ 5,00
90 mm cut-out with deep	D-90	Ø90	adjustable 30°			€ 5,00



13 Watt

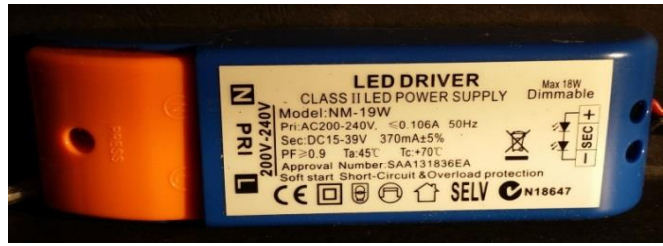

17 Watt



13 Watt



17 Watt

